

# Naica<sup>™</sup> System

for Crystal Digital<sup>™</sup> PCR




3-color digital PCR within 2h30

## **Crystal Digital PCR**

Crystal Digital PCR is Stilla's next-generation technology for absolute quantification of nucleic acids.

Using cutting-edge microfluidic innovations, this technology integrates the digital PCR process in a single consumable. The sample is first flowed through a network of microchannels and partitioned into a large 2D array of 30,000 individual droplets, also called a droplet crystal. PCR is then performed on-chip and the crystal is imaged to reveal the droplets that contain amplified targets. The last step consists in counting the number of these positive droplets to precisely extract the absolute quantity of nucleic acids.

With Crystal Digital PCR, the combination of powerful image analysis and intuitive visual inspection offers an unmatched level of confidence in the digital PCR measurement, yielding data you can truly trust.

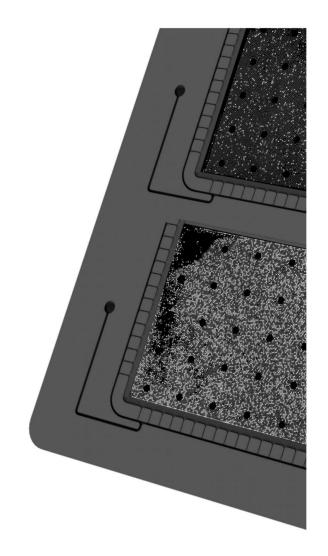

# What is the Naica System?

The Naica System leverages the key assets of Crystal Digital PCR in a compact, easy-to-use, fast and reliable digital PCR solution.



### An easy-to-use and integrated solution

A single consumable per experiment

Two instruments for the entire workflow



### The fastest time-to-result on the market

Digital PCR results within 2h30, including thermocycling

Less than 5 min hands-on time



### Reliable multiplex digital PCR

A unique 3-color detection

User-friendly analysis software

# **1** Generate crystals & Amplify




- Load the reaction mixes into the wells of the Sapphire chips
- Place the chips into the Naica Geode
- Launch the Crystal Digital PCR program

Crystals of 30,000 droplets are created from each sample

PCR amplification is performed immediately after crystal generation






# 2 Read & Analyze





- Transfer the chips to the Naica Prism3 crystal reader
  - Crystals are read using 3 fluorescent channels
- Measure the concentrations of targeted nucleic acids with Crystal Miner™software



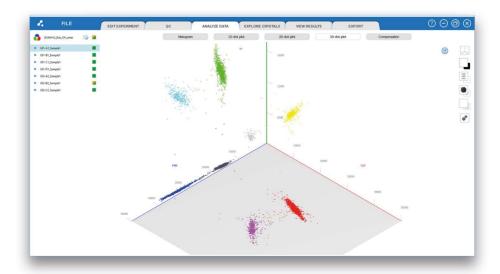

# Sapphire chip



#### **Specifications**

Capacity
Input volume
Droplets per sample
Droplet volume
Dynamic range
Precision at 95% CI

Up to 4 samples / chip 25 μL / sample 25 000 - 30 000 0.59 nL 5 logs 10%

## Naica Geode



#### **Specifications**

Capacity Up to 12 samples (3 chips) / run Thermo block temperature range Block uniformity (at 72 °C)  $\pm$  0.5 °C  $\pm$  0.1 to 1.0 °C

#### **Technical information**

Dimensions (W x D x H)  $35 \times 37 \times 29 \text{ cm}$  (14 x 15 x 11 inch) Weight 15 kg Power supply 110 - 220 V // 50 - 60 Hz Pressure input 1.3 bar (19 psi) Air

## Naica Prism3



#### **Specifications**

 $\begin{array}{lll} \mbox{Capacity} & \mbox{Up to 12 samples (3 chips) / run} \\ \mbox{Scan time} & \mbox{50s/sample} \\ \mbox{Sample illumination} & \mbox{High power LED} \\ \mbox{Excitation wavelengths} & \mbox{415-480 nm (blue) // 530-550 nm (green) // 615-645 nm (red)} \\ \mbox{Detection wavelengths} & \mbox{495-520 nm // 560-610 nm // 655-720 nm} \\ \mbox{Compatible fluorophores} & \mbox{FAM, ... // Cy3, VIC, HEX, ... // Cy5, ...} \\ \end{array}$ 

### Technical information

Dimensions (W x D x H) 44 x 34 x 21 cm (17 x 13 x 8 inch)
Weight 18 kg

Power supply 100 - 240 V // 50 - 60 Hz

### Contact

#### **STILLA Technologies**



Villejuif Biopark 1 mail du professeur Georges Mathé 94 800 Villejuif // France

info@stilla.fr www.stillatechnologies.com

+33 9 82 29 50 50